



(11) **EP 1 217 781 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
26.06.2002 Bulletin 2002/26

(51) Int Cl.7: **H04L 7/04, H04L 27/14**

(21) Application number: **00311489.9**

(22) Date of filing: **20.12.2000**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
 Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **Agilent Technologies, Inc. (a Delaware corporation)**
Palo Alto, CA 94303 (US)


(72) Inventor: **Mill, Alistair**
Trinity, Edinburgh EH5 3BQ (GB)

(74) Representative: **Coker, David Graeme et al**
Agilent Technologies UK Ltd,
Legal Dept,
Eskdale Road,
Winnersh Triangle
Wokingham, Berks RG41 5DZ (GB)

(54) **Detecting preambles of data packets**

(57) Fast detection of the preamble of a Bluetooth data packet is accomplished by correlating the frequency deviation of the data packet signal with a cosine waveform. When a good correlation is detected, a por-

tion of the data packet following the presumed preamble is inspected to confirm that it corresponds to the expected contents of part of a Bluetooth sync word, and thereby locate the bit p0 of the preamble precisely.

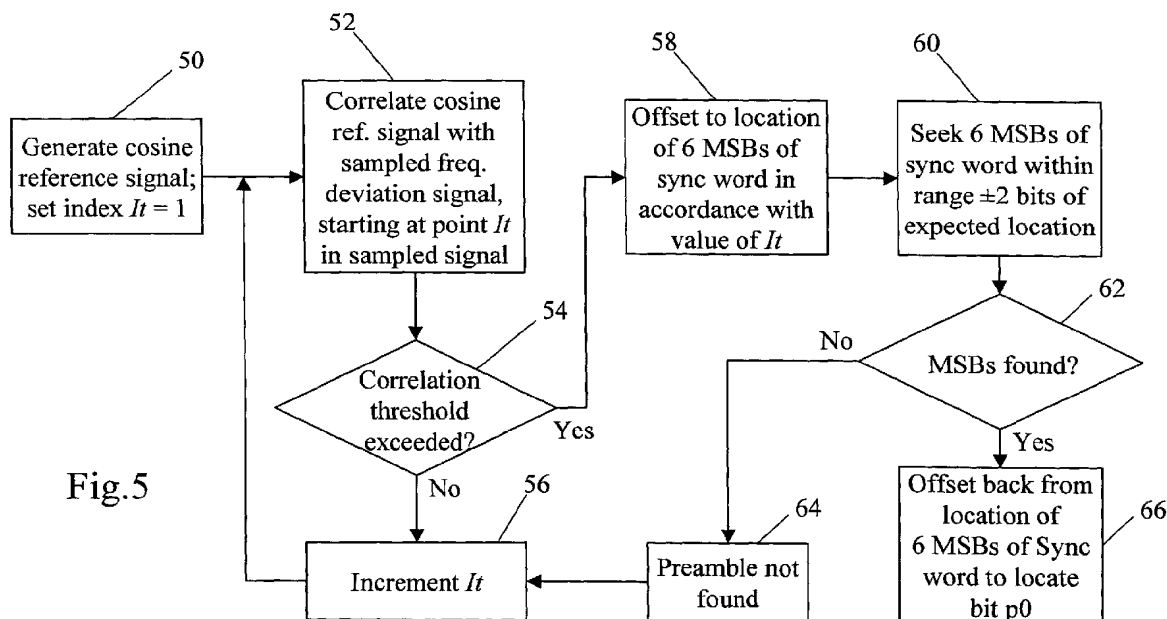

EP 1 217 781 A1

DescriptionTechnical Field

5 **[0001]** This invention relates to the detection of preambles of data packets, for example in data communications systems.

Background Art

10 **[0002]** Many communications systems transmit streams of data by dividing a data stream into successive portions and assembling each portion together with, for example, addressing information and error detection and correction information to produce a data packet (sometimes alternatively known as a cell or frame). Each data packet is then transmitted independently by modulating an electrical or electromagnetic (radio or optical) signal in accordance with the packet's contents and transmitting the signal via the relevant communications medium to a receiver. Functions
 15 such as intermediate storage, error detection and retransmission are performed at the packet level. The format of data within a packet is typically defined in terms of successive functional groups of symbols (such as bits in a binary digital system), where the interval between symbols is defined in terms of the frequency of a clock signal which controls the timing of electrical or electromagnetic signal transitions representing the data symbols. Boundaries between successive packets in a symbol stream may be defined in various ways, such as by providing a fixed pattern of symbols to identify
 20 the start or end of a packet.

[0003] In asynchronous communications systems, that is systems in which no master clock signal is used to co-ordinate the operation of system nodes, receiving nodes must be able to recognise and synchronise with the signal transitions which represent the data symbols, and to identify the boundaries between successive data packets. Such systems particularly include (but are not limited to) wireless systems in which data is transmitted by modulation of
 25 electromagnetic signals, such as r.f. or optical signals. Examples include the Digital Enhanced Cordless Telecommunications (DECT) standard defined by the European Telecommunications Standards Institute (ETSI) in EN 300 444 and associated documents, and the Bluetooth short-range wireless standard defined by the Bluetooth Special Interest Group in the *Specification of the Bluetooth System*, v1.0 B, Dec 1999 (available via the URL <http://www.bluetooth.com>).

[0004] It is also desirable to ensure that the numbers of each different kind of symbol (for example binary 0's and
 30 1's) in the transmitted signal are approximately equal, to avoid problems of long-term d.c. offset in electrical circuits carrying the signal.

[0005] The need for synchronisation, boundary recognition and d.c. compensation is typically met by commencing each packet with blocks of data symbols with predetermined values. These blocks are known in the Bluetooth standard, for example, as preambles and sync words. The Bluetooth preamble has a value of either 1010 or 0101 (binary), chosen
 35 to facilitate d.c. compensation in accordance with whether the least significant bit (LSB) of the sync word which immediately follows the preamble is 1 or 0 respectively. The Bluetooth sync word is a 64-bit word derived in a manner which ensures large Hamming distance between different sync words and provides good auto-correlation properties of the sync word to assist the timing synchronisation process. The sync word is followed by a 4-bit trailer which has a value of 1010 or 0101, depending on whether the most significant bit (MSB) of the sync word is 0 or 1 respectively, to provide
 40 for extended d.c. compensation.

[0006] The Bluetooth wireless signal is produced by applying a binary frequency-shift keyed (FSK) 0.5BT Gaussian-filtered baseband modulation to a carrier signal in the 2.4 GHz ISM band, such that a binary one is represented by a positive frequency deviation and a binary zero by a negative frequency deviation.

[0007] In certain circumstances it is necessary to be able to determine precisely the position of the preamble's LSB, also known as the bit p0, within a Bluetooth signal. For example, the RF Test Specification for conformance testing of Bluetooth-enabled devices defines various tests which depend upon knowledge of the position of the bit p0, to identify
 45 the start of signal bursts to be measured or the position of payload data bits within the signal.

[0008] In known systems with similar signal formats (such as DECT) this may be accomplished in one of two ways:

- 50 - Match the bit pattern of the sync word. This is feasible for DECT signals, which have only two possible sync word patterns, but infeasible for Bluetooth signals for which the sync word can be any 64-bit word
- Manually adjust a trigger delay setting until a visual display of the Bluetooth signal is aligned with a marker indicating the desired position of the p0 bit. This is a difficult and time-consuming process which is prone to error, and therefore especially unsuitable in the context of testing of equipment on a production line where speed and accuracy of
 55 testing are of great significance.

[0009] It is an object of this invention to facilitate the precise and rapid detection of a selected portion of a data packet, such as the preamble (including the bit p0) of a Bluetooth data packet.

Disclosure of Invention

[0010] According to one aspect of this invention there is provided a method of detecting a selected portion of a data packet, comprising the steps of:

5 defining a reference signal waveform conforming to an expected waveform representing a signal modulated in accordance with a selected portion of a data packet;
 receiving a data signal containing a data packet with said selected portion;
 deriving a waveform representing said data signal;
 10 correlating said reference signal waveform with said waveform representing said data signal to produce a correlation result; and
 identifying said selected portion in said data signal in accordance with said correlation result.

[0011] In the context of testing a Bluetooth-enabled device, the invention searches the received data stream for a known pattern of binary 1010 which is embedded within the preamble (or the preamble plus LSB of the sync word if the preamble itself is 0101). More particularly, the invention exploits the fact that a frequency-discriminated 1010 preamble of a Bluetooth signal with its Gaussian-filtered baseband modulation is very similar in waveform to a sinusoidal (specifically cosine) wave. Thus correlation of a frequency-discriminated Bluetooth signal with a cosine wave enables rapid detection of 1010 sequences in the signal. Simple additional processing provides verification that a detected
 20 1010 sequence is indeed the preamble, and confirmation of whether the preamble is actually 1010 or 0101, so that the precise location of the bit p0 can be determined. The reference cosine waveform is simple to generate, and as the length of the comparison sequence (4 bits) is short, relatively little processing power is required for a correlation to provide a result quickly and entirely automatically.

Brief Description of Drawings

[0012] A method and apparatus in accordance with this invention, for detecting the location of the bit p0 in a Bluetooth modulated signal, will now be described, by way of example, with reference to the accompanying drawings, in which:

30 Figure 1 shows the structure of a Bluetooth DH1 (Data - High rate) data packet;
 Figures 2a and 2b show the position of the bit p0 in a Bluetooth modulated signal for each possible value of preamble;
 Figure 3 is a schematic block diagram of apparatus for implementing the invention;
 Figure 4 illustrates the process of correlating a waveform derived from a Bluetooth signal with a reference
 35 cosine waveform; and
 Figure 5 is a flow chart showing a procedure for performing correlation and subsequent processing to confirm the position of the bit p0.

Best Mode for Carrying Out the Invention, & Industrial Applicability

40 **[0013]** Figure 1 shows, by way of example, one kind of Bluetooth data packet 10 (a DH1 packet). Referring to Figure 1, the packet 10 comprises: an access code 12, comprising 72 bits; a header 14, comprising 54 bits; and a payload 16, comprising 240 bits (an 8-bit header, 27 8-bit bytes, and a 16-bit CRC code). In other kinds of Bluetooth packets the payload may have a different number of bits, between 0 and 2745 depending on the packet.

45 **[0014]** The access code 12 itself comprises three portions: a preamble 18, comprising 4 bits with a value of either 1010 or 0101 as described earlier, and the first bit (LSB) of which is the bit p0; a sync word 20, comprising 64 bits, derived from the unique device address of a Bluetooth device; and a trailer 22, comprising 4 bits with a value of either 0101 or 1010 as described earlier. In other Bluetooth packet types, comprising only the access code, the trailer is omitted.

50 **[0015]** The derivation of the sync word is such that its six most significant bits (MSBs), i.e. the 59th to 64th bits, have a value of either 001101 or 110010, depending on whether the 58th bit (derived from the device address mentioned above) is 0 or 1 respectively.

[0016] A Bluetooth signal comprises a carrier wave which is binary FSK modulated with a Gaussian-filtered baseband signal. As a result, and as shown in Figures 2a and 2b, the waveform of a frequency-discriminated version of the modulated carrier wave closely resembles a simple sinusoidal wave, with the positive and negative peaks of the sinusoid representing maximum positive and negative frequency deviation, and binary one and zero, respectively. In the case of a preamble with a value 1010 the temporal location of the bit p0 corresponds to the first positive peak 24 of the sinusoid, as shown in Figure 2a. For a preamble with a value of 0101, the bit p0 occurs at the first negative peak 26

of the sinusoid, as shown in Figure 2b.

[0017] Figure 3 shows apparatus for detecting the preamble of a Bluetooth data packet. Referring to Figure 3, the 2.4 GHz RF signal from a Bluetooth device 30 under test is supplied to an input of a spectrum analyser 32 operating in zero span (fixed tuned) mode, where the signal is fed to a mixer 34 which also receives a signal from a local oscillator 36. The frequency of this oscillator is offset relative to the Bluetooth RF signal so that the mixer generates an FSK modulated heterodyne signal corresponding to the RF signal, but at a chosen lower intermediate frequency (IF). This IF signal is passed to an analogue frequency discriminator 38 which generates an output voltage representative of the deviation of the FSK modulated signal relative to its centre frequency. The frequency deviation voltage is sampled and digitised in a fast analogue-to-digital converter (ADC) 40, and the digitised samples are supplied to a correlator 42.

[0018] The correlator 42 may be implemented using a digital signal processor (DSP) or other more general-purpose processor, executing a set of software program instructions to control its operation. The principal function of the correlator is to compare the digitised frequency deviation signal from the ADC 40 with a reference digitised signal representing 540 degrees ($1\frac{1}{2}$ cycles) of a cosine waveform, shown in dashed line in Figure 4. The frequency and amplitude of this reference waveform are chosen to correspond to the sample rate and expected frequency deviation of a Bluetooth modulated 1010 signal. A suitable frequency deviation figure is 138.6 kHz, derived as follows: the modulation index of a Bluetooth signal can be between 0.28 and 0.35, so assume a mid-point value of 0.315; the frequency of modulation is 500 kHz (2 symbols per cycle providing 1 Mbit/s; so the maximum frequency deviation = modulation index * frequency of modulation = $0.315 * 500 = 157.5$ kHz. The 0.5BT Gaussian filtering results in a maximum deviation for a repeating 1010 data pattern of approximately 88% of the maximum deviation for a repeating 11110000 data pattern. Accordingly the expected frequency deviation is $157.5 * 0.88 = 138.6$ kHz. If desired the frequency and amplitude of the reference waveform can be made adjustable.

[0019] The correlation is performed multiple times as the relative phase of the frequency deviation signal and the reference waveform are varied through a predetermined range, and the correlation result is inspected to identify a phase relationship for which a close fit exists between the reference waveform and a portion of the frequency deviation signal of similar duration. Thereafter checks are made to confirm that the selected portion of the frequency deviation signal does indeed correspond to the packet preamble, and to discriminate between the two possible preamble values.

[0020] The steps performed by the correlator 42 are shown in Figure 5. Referring to Figure 5, at step 50 the cosine reference signal is generated and an index *It*, which is used to control the relative phasing of the two correlated signals, is set to 1. At step 52 a value is derived for the correlation between the reference and frequency deviation signals. The value of each successive sample of the reference signal is multiplied with the value of a corresponding sample of the frequency deviation signal, starting at the sample identified by the index *It*. The products of all the multiplications for the set of samples making up the reference signal are summed to produce the required correlation value.

[0021] At step 54 the correlation value is compared with a predetermined correlation threshold selected to indicate when a good match between the correlated signals has occurred which is indicative that the preamble has been located. A threshold value of 0.37, determined empirically, has been found to provide satisfactory results. If the correlation value does not exceed the threshold, the procedure continues to step 56, where the index *It* is incremented by 1. Thereafter the procedure returns to step 52 to repeat the derivation of the correlation value for the new relative phase relationship of the correlated signals.

[0022] When the test at step 54 indicates that the correlation value exceeds the threshold, the procedure advances to step 58, where the identity and value of the preamble is confirmed. These steps are necessary because there is a possibility of the reference signal correlating strongly with a portion of the packet payload, for example, which by chance has a value of 1010 or 0101. This strong correlation would give a spurious indication of the location of the preamble. In addition, the cosine reference signal by design cannot discriminate between the two possible preamble values (it may correlate either with the preamble proper, or with the three MSBs of the preamble together with the LSB of the sync word). However, such discrimination is necessary to ensure precise location of the bit p0, because of the slight difference in timing of this bit for the two different preambles as shown in Figures 2a and 2b. These problems are resolved by inspecting another portion of the access code 12 with known, unambiguous properties, namely the final six MSBs of the sync word 20 (see Figure 1). These six MSBs have only two possible values, which are mutually distinct irrespective of starting position for a comparison.

[0023] Accordingly at step 58 the procedure derives the offset to the expected location in the frequency deviation signal of these six MSBs, on the basis of an initial assumption that the detected preamble has a value of 1010 to determine a tentative location for the bit p0. Thus the required six MSBs should be located starting at 62 frequency deviation peaks after the positive peak tentatively determined as being the bit p0 in accordance with the value of the index *It*. At step 60 the procedure inspects the value of a block of six successive bits as represented by the frequency deviation signal, starting at a point two bits before the location identified at step 58. This block of six bits is compared with the two expected values for the six MSBs of the sync word, that is 001101 and 110010 (see Figure 1). If the selected block of six bits does not match either value, then the starting point for selecting the six bits is moved one bit in the more significant direction, and the comparison is repeated. This process is repeated until either a match with

one of the expected values for the six MSBs is found, or the search has extended to a starting point two bits after the location identified at step 58.

[0024] If it is established at step 62 that neither of the expected values for the block of six MSBs has been found, then it is determined at step 64 that the preamble has not in fact been located, and the procedure returns to step 56 to increment the index *It* and continue the correlation process.

[0025] If step 62 indicates that one of the MSB blocks has been found, the procedure advances to step 66. As well as verifying that a valid preamble has been detected, the starting point identified at step 60 for the six MSBs of the sync word enables the location of the bit *p0* to be determined precisely. More specifically, the location of the bit *p0* can be determined as being offset 62 frequency deviation peaks before the actual starting point for this block of six MSBs, irrespective of the value of the block.

[0026] Variations of the technique described above are possible. For example, the frequency deviation signal may be obtained by sampling the Bluetooth signal in the time domain (possibly after frequency down-conversion), and using a digital signal processor to derive the frequency deviation signal by differentiating the phase of the complex sample points with respect to time (frequency is the rate of change of phase).

Claims

1. A method of detecting a selected portion of a data packet, comprising the steps of:

defining a reference signal waveform conforming to an expected waveform representing a signal modulated in accordance with a selected portion of a data packet;
 receiving a data signal containing a data packet with said selected portion;
 deriving a waveform representing said data signal;
 correlating said reference signal waveform with said waveform representing said data signal to produce a correlation result; and
 identifying said selected portion in said data signal in accordance with said correlation result.

2. The method of claim 1, wherein said waveform representing said data signal is derived to represent a characteristic of modulation of said data signal in accordance with data in said data packet.
3. The method of claim 2, wherein said data signal is a frequency-shift keyed signal and said waveform representing said data signal is derived to represent frequency deviation of said data signal as a function of time.
4. The method of any one of the preceding claims, wherein said selected portion is a preamble of a data packet.
5. The method of claim 4, wherein said preamble has a plurality of values which can correlate with said reference signal waveform, including the step of examining a second part of the data packet to confirm identification of said preamble.
6. The method of any one of the preceding claims, wherein said data packet is a Bluetooth data packet.
7. The method of claim 6, wherein said reference signal waveform is a cosine waveform.
8. The method of claim 6 or claim 7, wherein a portion of a sync word in the data packet is examined to confirm identification of said preamble.
9. The method of claim 8, wherein the six most significant bits of the sync word are examined to confirm identification of said preamble.
10. The method of any one of claims 1 to 5, wherein said data packet is a DECT data packet.

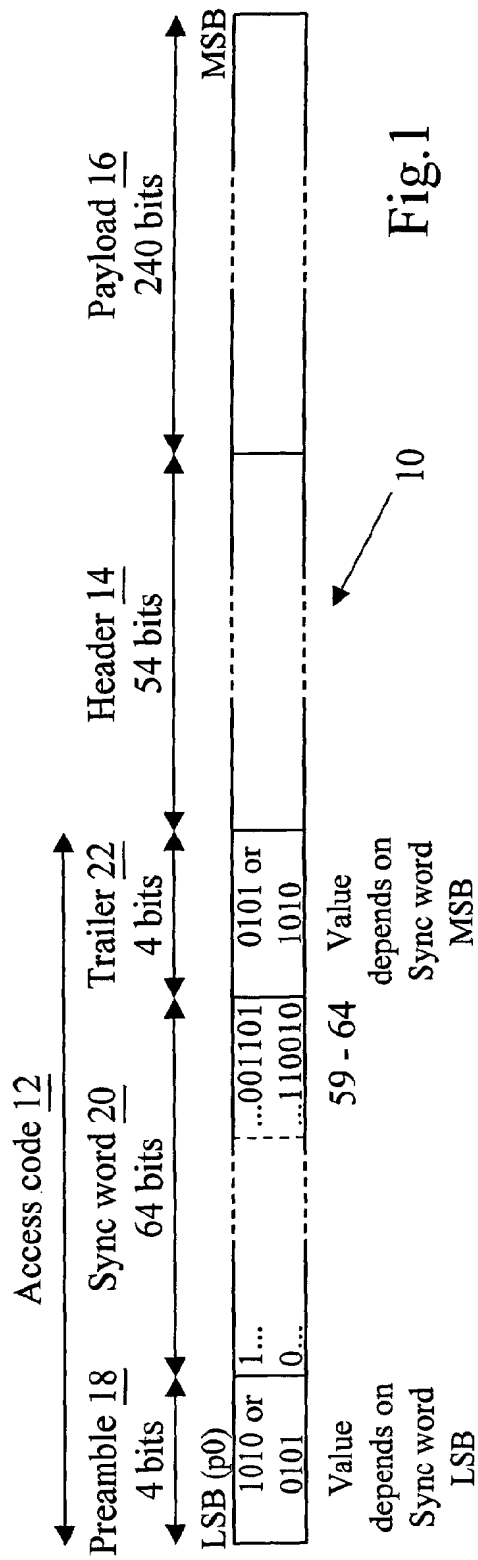


Fig.1

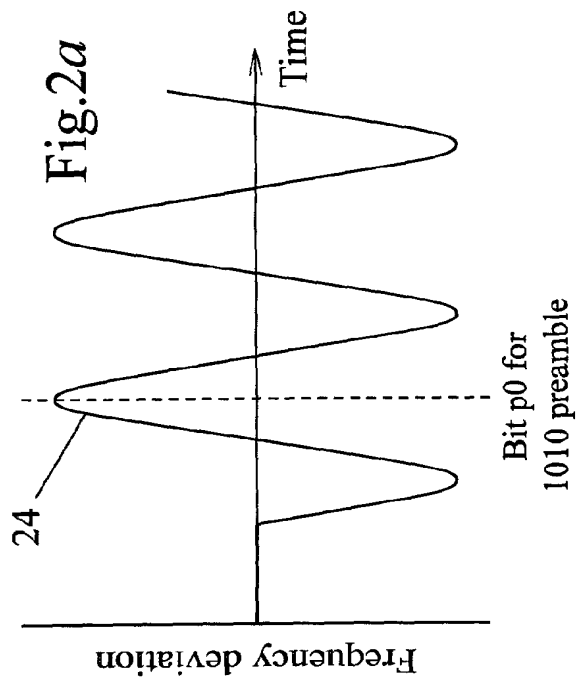


Fig.2a

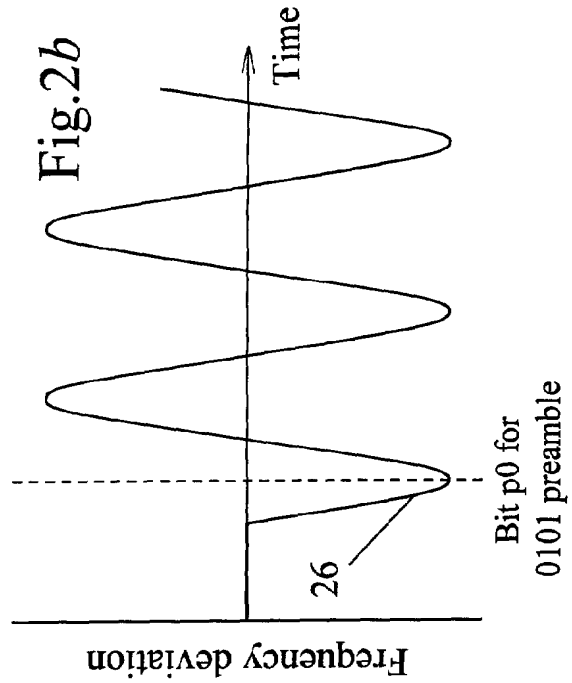
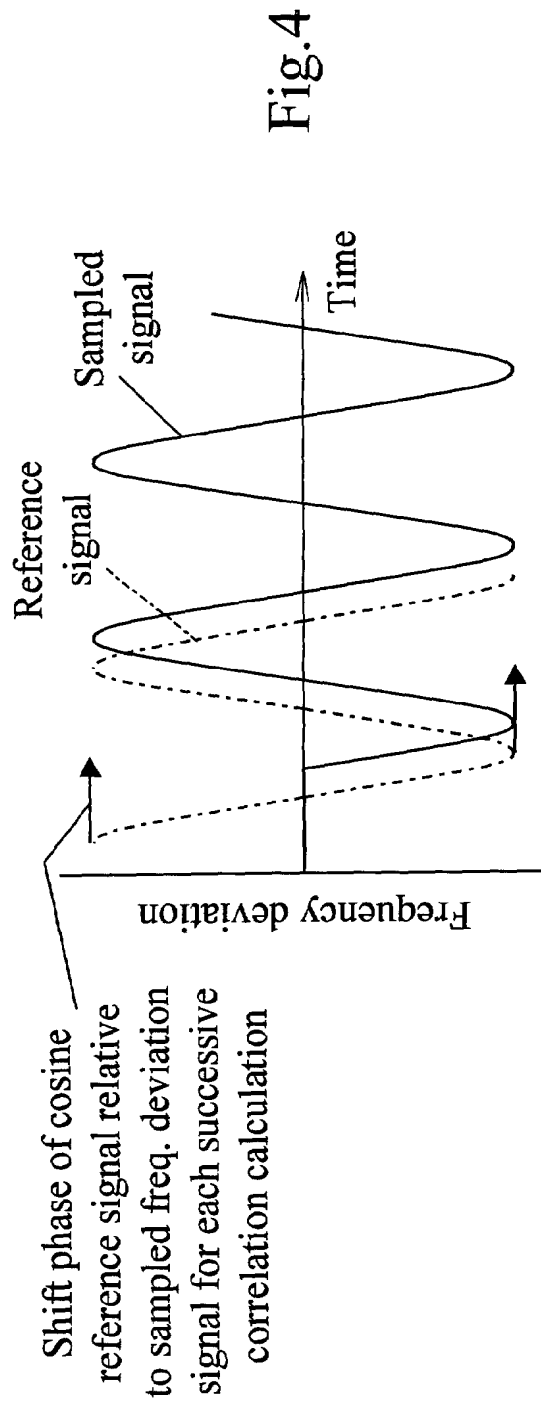
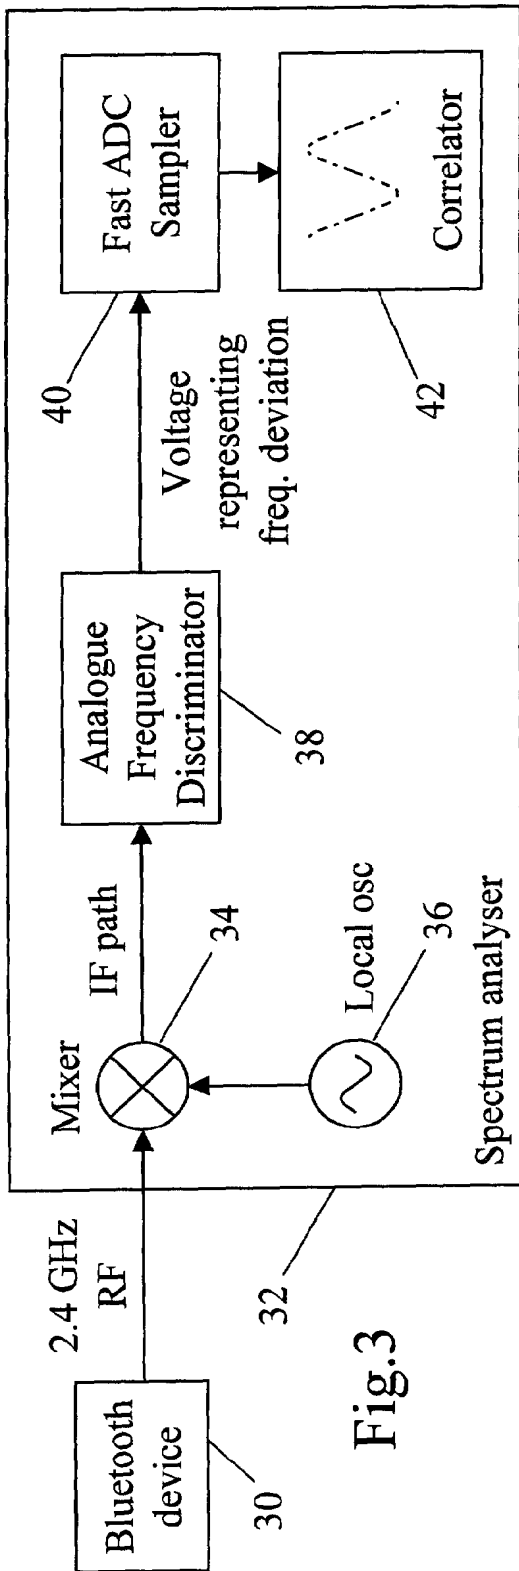


Fig.2b



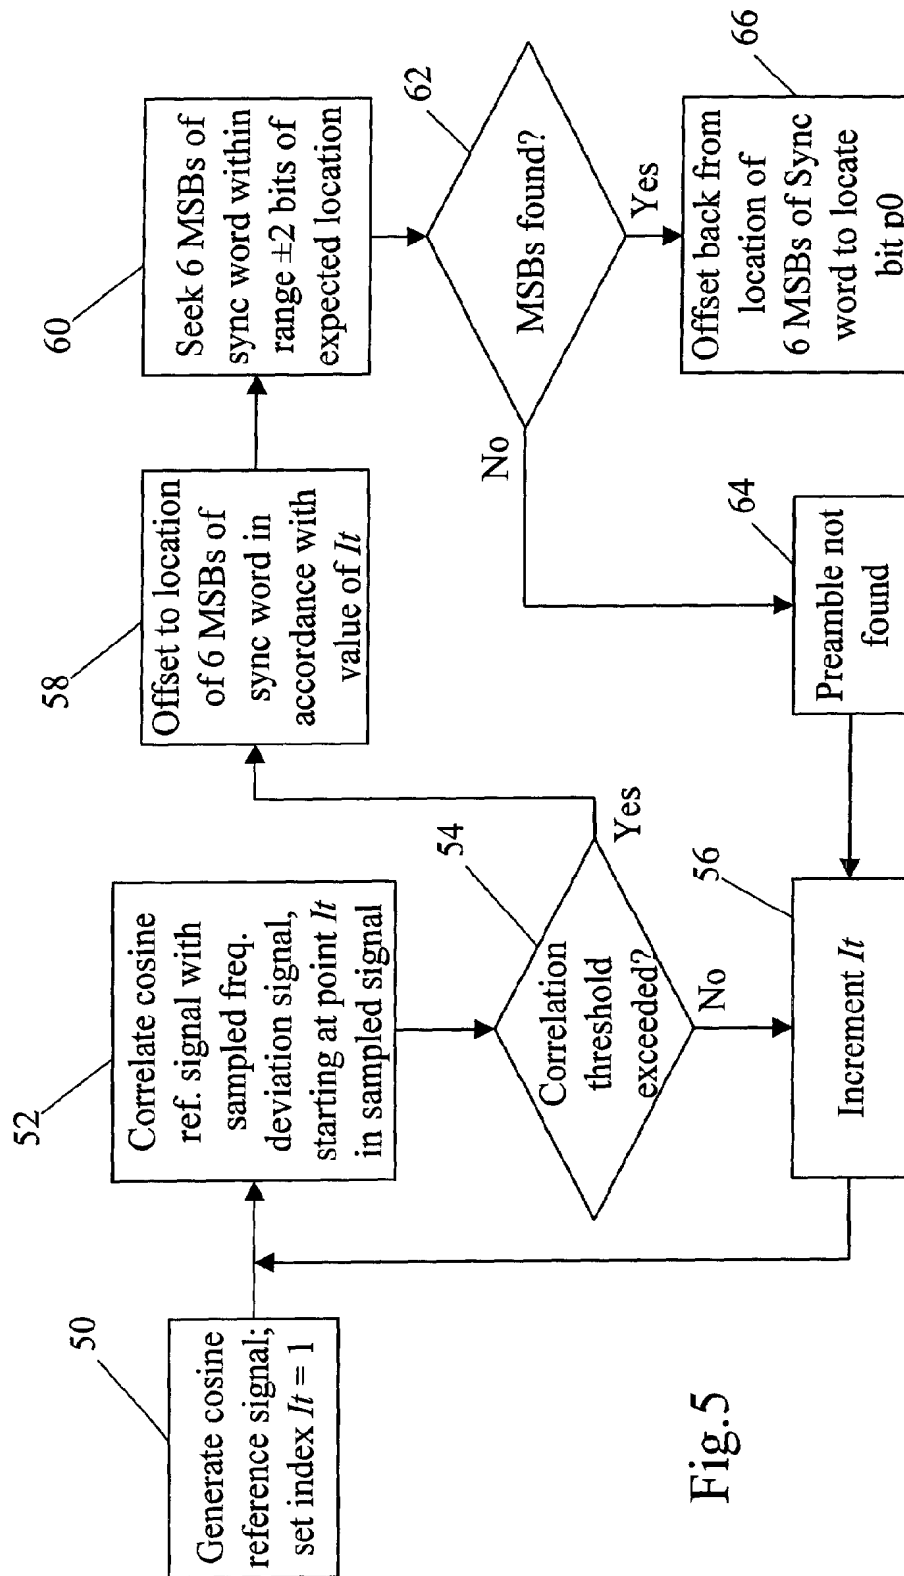


Fig.5



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 31 1489

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 907 558 A (WATANABE HIDEKAZU) 25 May 1999 (1999-05-25) * column 1, line 36 - line 61 * * column 5, line 4 - line 12 * * column 6, line 12 - line 33 * * column 7, line 1 - line 11 * * column 7, line 30 - line 35 * * column 8, line 58 - column 9, line 12 * * column 8, line 10 - line 26 * * figure 6 *	1-4,6,7,10	H04L7/04 H04L27/14
X	US 5 727 004 A (PROPP DAVID L ET AL) 10 March 1998 (1998-03-10) * column 4, line 17 - line 20 * * column 4, line 6 - line 26 * * column 4, line 66 - column 5, line 14 * * column 5, line 25 - line 57 * * column 6, line 1 - line 17 * * column 6, line 27 - line 34 * * column 6, line 42 - line 62 * * figure 2 *	1,4-7,10	
A		2,3	
A	SANCHEZ-PEREZ R ET AL: "ROBUST FM DATA TRANSMISSION IN MULTIPATH PROPAGATION ENVIRONMENTS" AMSTERDAM, SEPT. 19 - 22, 1999, NEW YORK, NY: IEEE, US, vol. CONF. 50, 19 September 1999 (1999-09-19), pages 2959-2963, XP000922299 ISBN: 0-7803-5436-2 * abstract *	3,10	H04L
A	US 5 343 497 A (CANOSI CLAUDIO ET AL) 30 August 1994 (1994-08-30) * column 3, line 37 - line 49 * * column 4, line 1 - line 24 * * column 6, line 36 - column 7, line 2 *	2,3,8	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 29 June 2001	Examiner Pieper, T
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application I : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EP FORM 1503 03 82 (FOCUS)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 31 1489

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 625 573 A (KIM IN-KYUNG) 29 April 1997 (1997-04-29) * column 1, line 26 - line 33 * * column 3, line 66 - column 4, line 2 * * column 5, line 33 - column 6, line 2 * -----	2,3,9	
A	US 4 984 249 A (BAKER FRANCIS M ET AL) 8 January 1991 (1991-01-08) * column 2, line 64 - column 3, line 4 * * column 3, line 32 - line 39 * * column 5, line 9 - line 28 * * figure 3 * -----	1,4,5	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search THE HAGUE		Date of completion of the search 29 June 2001	Examiner Pieper, T
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03-82 (P04.001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 31 1489

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-06-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5907558 A	25-05-1999	JP 9312640 A	02-12-1997
		CN 1174479 A	25-02-1998
		FI 972143 A	22-11-1997
		SE 9701879 A	22-11-1997
US 5727004 A	10-03-1998	AU 707999 B	29-07-1999
		AU 5250896 A	02-10-1996
		CA 2215380 A	19-09-1996
		CN 1184537 A	10-06-1998
		EP 0815509 A	07-01-1998
		JP 11502085 T	16-02-1999
		WO 9628779 A	19-09-1996
		US 5944842 A	31-08-1999
US 5343497 A	30-08-1994	US 5872791 A	16-02-1999
		IT 1236978 B	12-05-1993
		DE 69008866 D	16-06-1994
		DE 69008866 T	15-12-1994
		EP 0506803 A	07-10-1992
US 5625573 A	29-04-1997	WO 9110305 A	11-07-1991
		CA 2170803 A	02-09-1996
US 4984249 A	08-01-1991	CN 1140369 A	15-01-1997
		NONE	

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82